

 **This page is not fully translated, yet. Please help completing the translation.**
(remove this paragraph once the translation is finished)

GenerateEscalationTimeHandler

Description

This [handler](#) is used to set the escalation time of a [Node](#) after the expiration of the previously-defined wait time. At the escalation time, the value of the **“escalationVariable”** [process variable](#) is selected. This value is used as the name for a new [process variable](#), and its value is set to “escalation”.

Tip

This can be used in combination with the [VariableDecisionHandler](#) and determine a process route.

The corresponding timer is the [performEscalationForNodesTimerWithLimit](#).

NodeEscalationHandler

The GenerateEscalationTimeHandler uses the NodeEscalationHandler, which sets the escalation variable and send the process further.

Action Class

```
com.dooris.bpm.actionhandler.GenerateEscalationTimeHandler
```

Event Type

node-enter


Action Name

any

Parameter

none

A process variable with the name “escalationVariable” must be present.

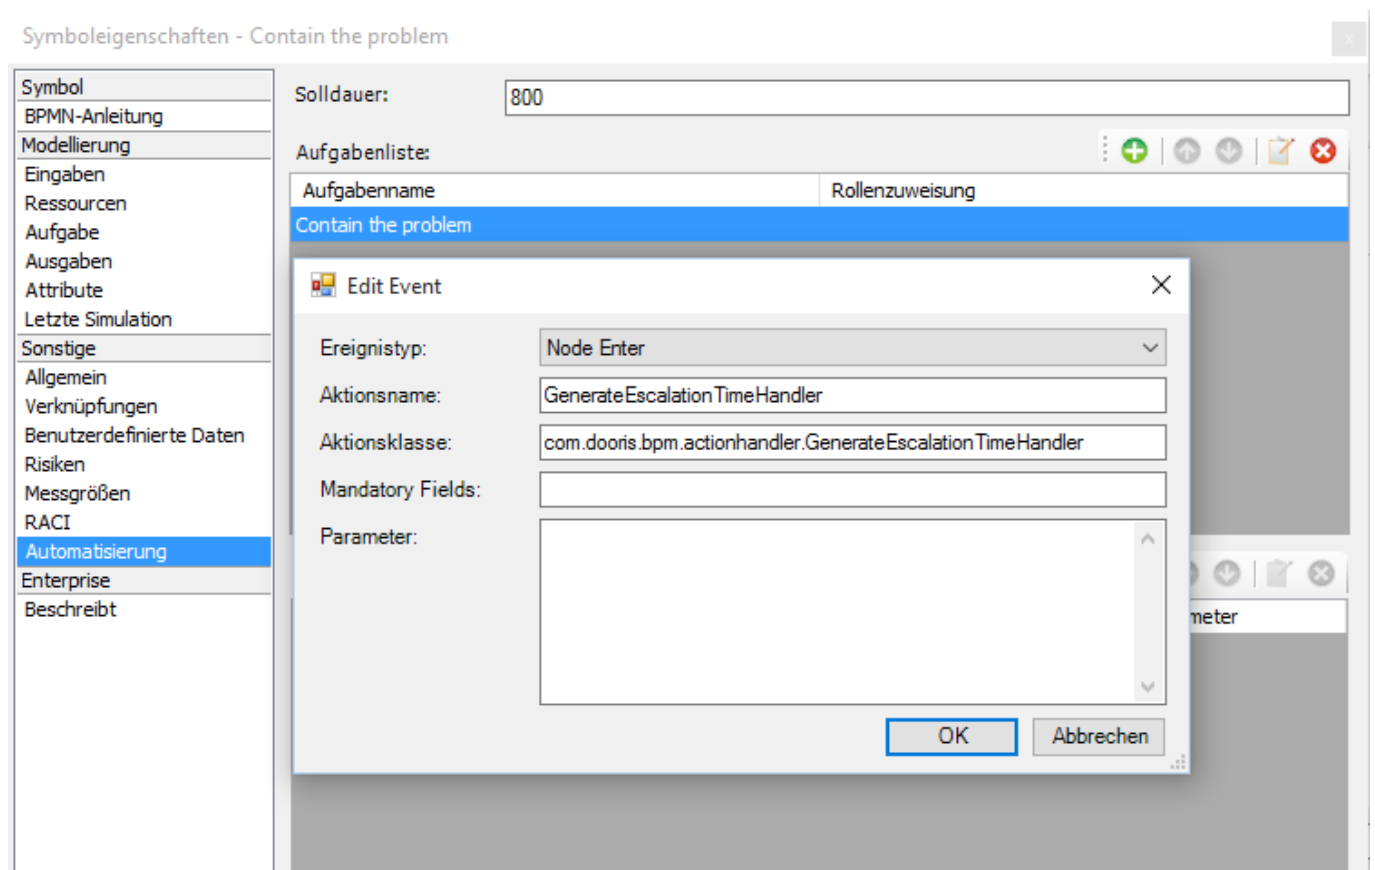

Dependencies

Timer : [Escalation timer](#)

From:
<https://wiki.tim-solutions.de/> - **TIM Wiki** / [NEW TIM 6 Documentation](#)

Permanent link:
<https://wiki.tim-solutions.de/doku.php?id=en:software:tim:actionhandler:generateescalationtimehandler>

Last update: **2021/07/01 09:52**

