

 **This page is not fully translated, yet. Please help completing the translation.**
(remove this paragraph once the translation is finished)

ImportProcessEntitiesHandler

Description

This action handler can read documents, process variables, and the current user from open tasks in a user-defined instance. These may then be imported into the process instance, which is called by the handler.

Action Class

```
com.dooris.bpm.actionhandler.ImportProcessEntitiesHandler
```

Event Type

any

Action Name

any

Mandatory Fields

-

Parameter

processInstancelId

ID of the process instance from which the importation occurs. A variable may also be passed here (see [example 1](#))

variables

Denotes if an importation of variables is desired. Set to true by default (see [example 1](#)). Possible values are:

- true
- false

excludedVariables

This parameter is used to exclude variables from the import process. Exclude variables are separated by commas (see [example 2](#)).

ATTENTION! If excludedVariables is not provided, all process variables will be imported!

includedVariables

This parameter is used to include variables in the import process. Exclude variables are separated by commas (see [example 3](#)).

ATTENTION! If includedVariables is not provided, all process variables will be imported!

docs

Denotes if documents should be imported. Set to true by default (see [example 1](#)). Possible values are:

- true
- false

currentAssignees

Denotes if the current status of the process instance should be imported. Set to true by default (see [example 1](#)). Possible values are:

- true
- false


ATTENTION!

If “true” is given here, new process variables will be created, if possible:


- currentAssigneesNodeName[n] → Current open activity
- currentAssigneesTaskName[n] → Current open task
- currentAssigneesPoolAssignment[n] → Current assigned group
- currentAssigneesFirstName[n] → First name of the assignee
- currentAssigneesLastName[n] → Last name of the assignee
- currentAssigneesEmail[n] → E-mail of the assignee
- currentAssigneesPhoneNumber[n] → Phone number of the assignee

[n] is determined by the number of open tasks (0-x).

Example 1

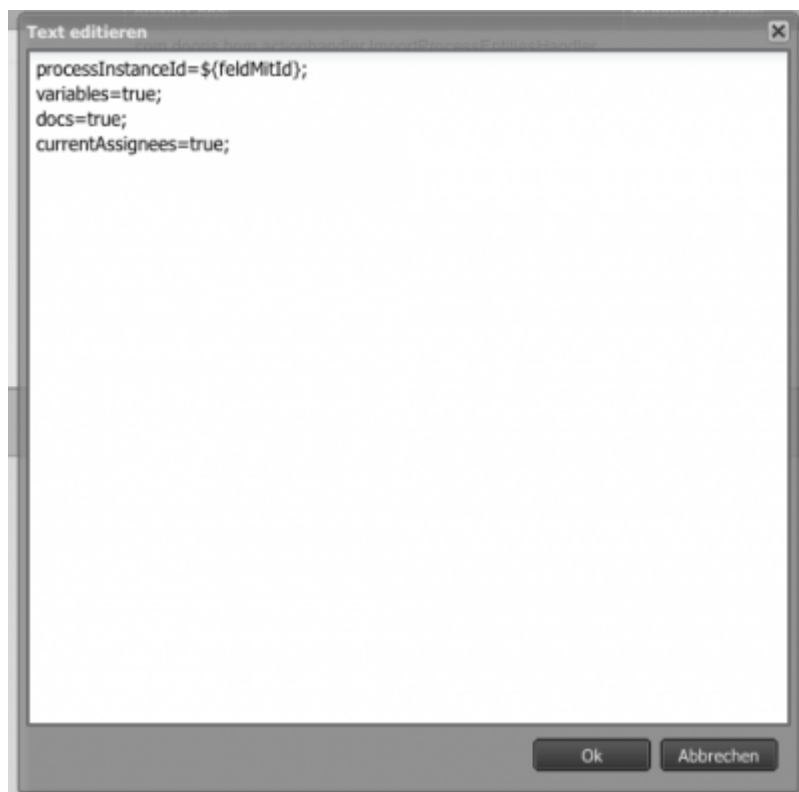

Example 2

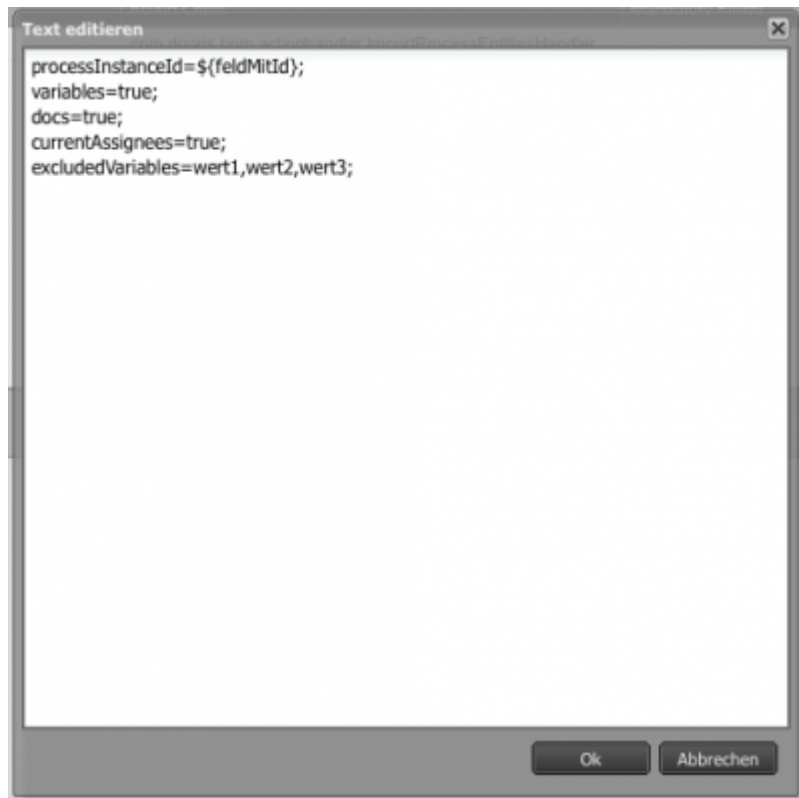

Example 3



From:

<https://wiki.tim-solutions.de/> - **TIM Wiki** / [NEW TIM 6 Documentation](#)

Permanent link:

<https://wiki.tim-solutions.de/doku.php?id=en:software:tim:actionhandler:importprocessentitieshandler>

Last update: **2021/07/01 09:52**

