

 **This page is not fully translated, yet. Please help completing the translation.**
(remove this paragraph once the translation is finished)

RenameInstanceHandler

Description

This [handler](#) renames the current instance by any text that can include variables.

Action Class

```
com.dooris.bpm.actionhandler.RenameInstanceHandler
```

Event Type

any type

Action Name

any name

Mandatory Fields


-

Parameter

instanceName = desired_name_\${variable}

Variables are specified as \${variablename} (see [Example](#))

Example

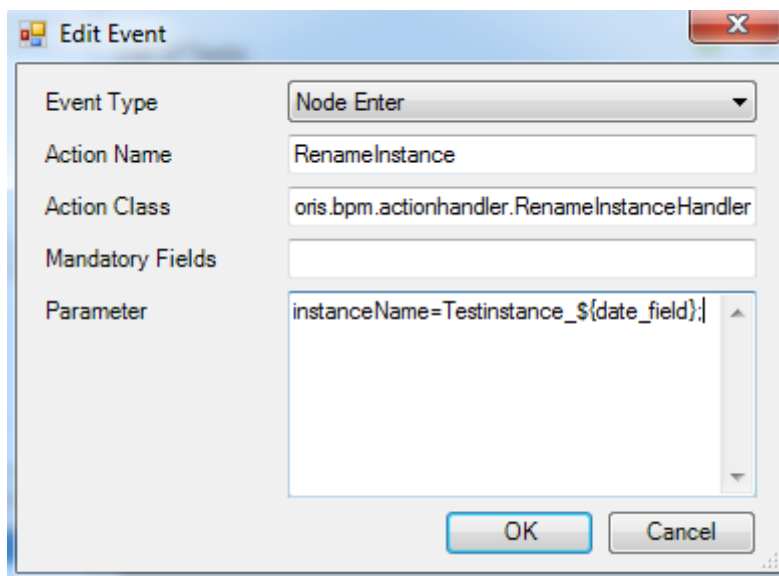

Edit Event

Event Type: Node Enter

Action Name: RenameInstance

Action Class: oris.bpm.actionhandler.RenameInstanceHandler

Mandatory Fields:

Parameter: instanceName=Testinstance_\${date_field};

OK Cancel

From:
<https://wiki.tim-solutions.de/> - **TIM Wiki** / [NEW TIM 6 Documentation](#)

Permanent link:
<https://wiki.tim-solutions.de/doku.php?id=en:software:tim:actionhandler:renameinstancehandler&rev=1418743919>

Last update: **2021/07/01 09:54**

