

 **This page is not fully translated, yet. Please help completing the translation.**  
*(remove this paragraph once the translation is finished)*

# ReturnRegexHandler

This [handler](#) returns the results of a **regular expression** as a string.

---

## Action Class

```
com.dooris.bpm.actionhandler.ReturnRegexHandler
```

---

## Event Type

any

## Action Name

any

## Parameter

**regex**

Here the **regular expressions** to be used are stored. The following Regex example can be used to extract a valid e-mail from an arbitrary text.

```
^[A-Z0-9._%+-]+@[A-Z0-9.-]+\.[A-Z]{2,}\$.
```

## content

The tested string, present as either a variable ( `${Prozessvariable}` ) or a string directly

## writeNameInVariable


The process variable to which the results are written

## matchAll

matchAll(Boolean) = true : all results are written to the process variable, false : only the first result will be stored.

By default, matchAll is set to true.

## Example

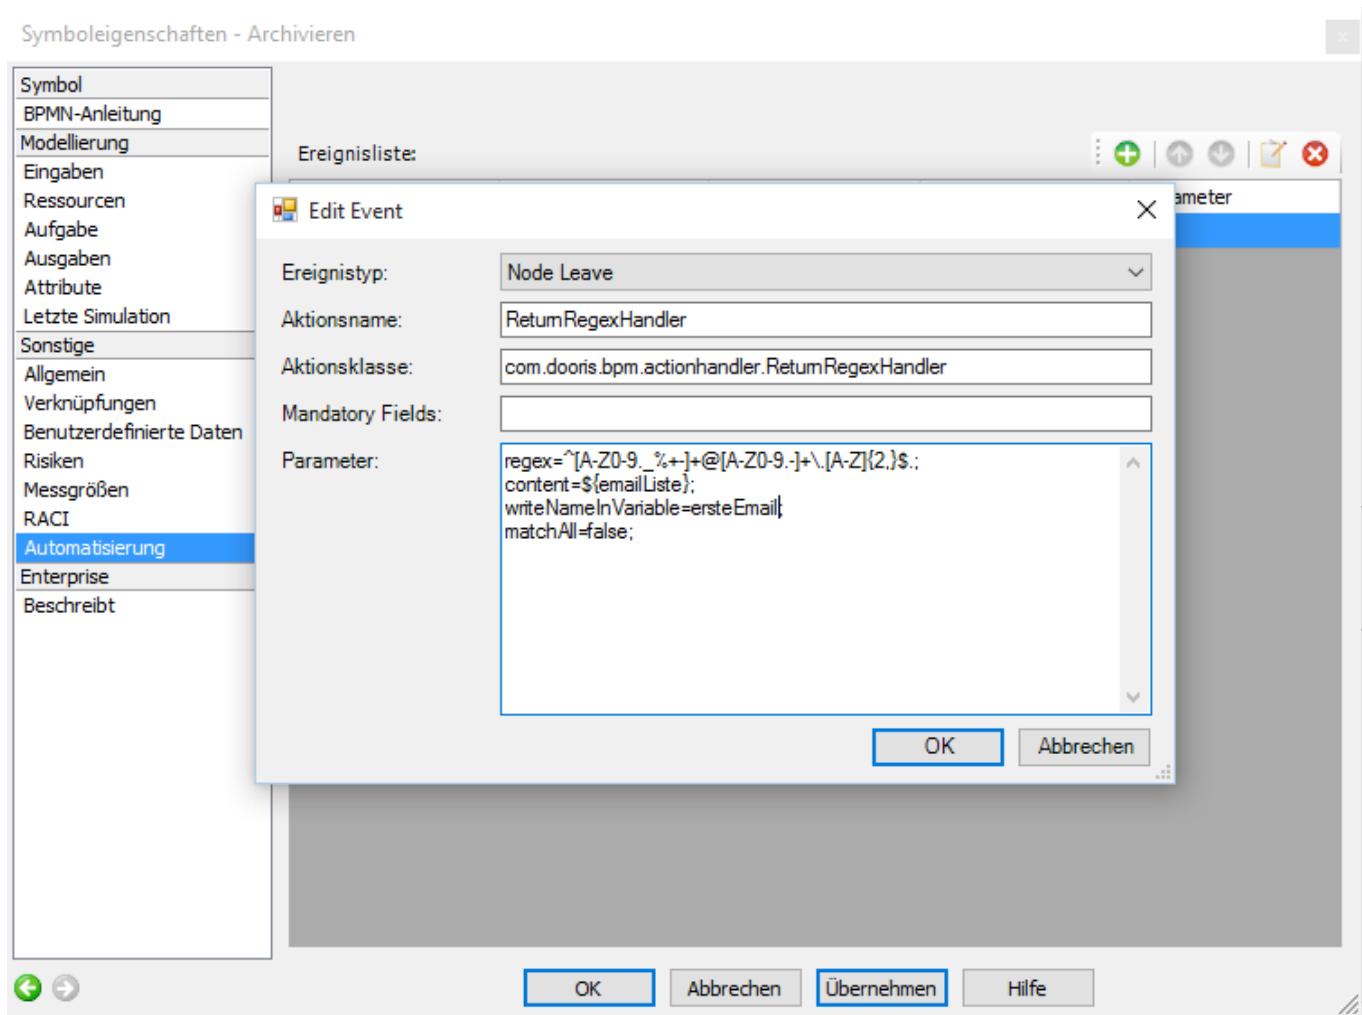

From:  
<https://wiki.tim-solutions.de/> - TIM Wiki / [NEW TIM 6 Documentation](#)

Permanent link:  
<https://wiki.tim-solutions.de/doku.php?id=en:software:tim:actionhandler:returnregexhandler&rev=1453301919>

Last update: 2021/07/01 09:54

