

# StartProcessInstanceActionHandler

## Description

This [handler](#) uses one instance in order to generate an additional, independent instance. The original instance continues to run without restriction.

---

## Action Class

```
com.dooris.bpm.actionhandler.StartProcessInstanceActionHandler
```

---

## Event Type

any type

## Action Name

any name

## Mandatory Fields

-

## Parameter

### **name**

If the parameter giveProcessVairables is set to false, the to be started processdefinition will be searched based on this parameter.

A processvariable needs to be handed over to this parameter.

### **defaultValue**

If the parameter giveProcessVairables is set to false, the to be started processdefinition will be searched based on this parameter, if nothing is found with the parameter name.

If the parameter giveProcessVairables is set to true, this parameter determines the name of the newly created instance.

### **prefixInstanceName**

Is inserted before the name of the newly created instance as a prefix.

If the parameter giveProcessVairables is set to true, this parameter will be ignored.

### **giveProcessVariables**


If this parameter is set to true, the processvariables will be handed over to the newly created instance.


Default is false.

### **strProcessDefinitionNameConfig**

If the parameter giveProcessVairablesis set to true, the to be started processdefinition will be searched based on this parameter.

## **example**

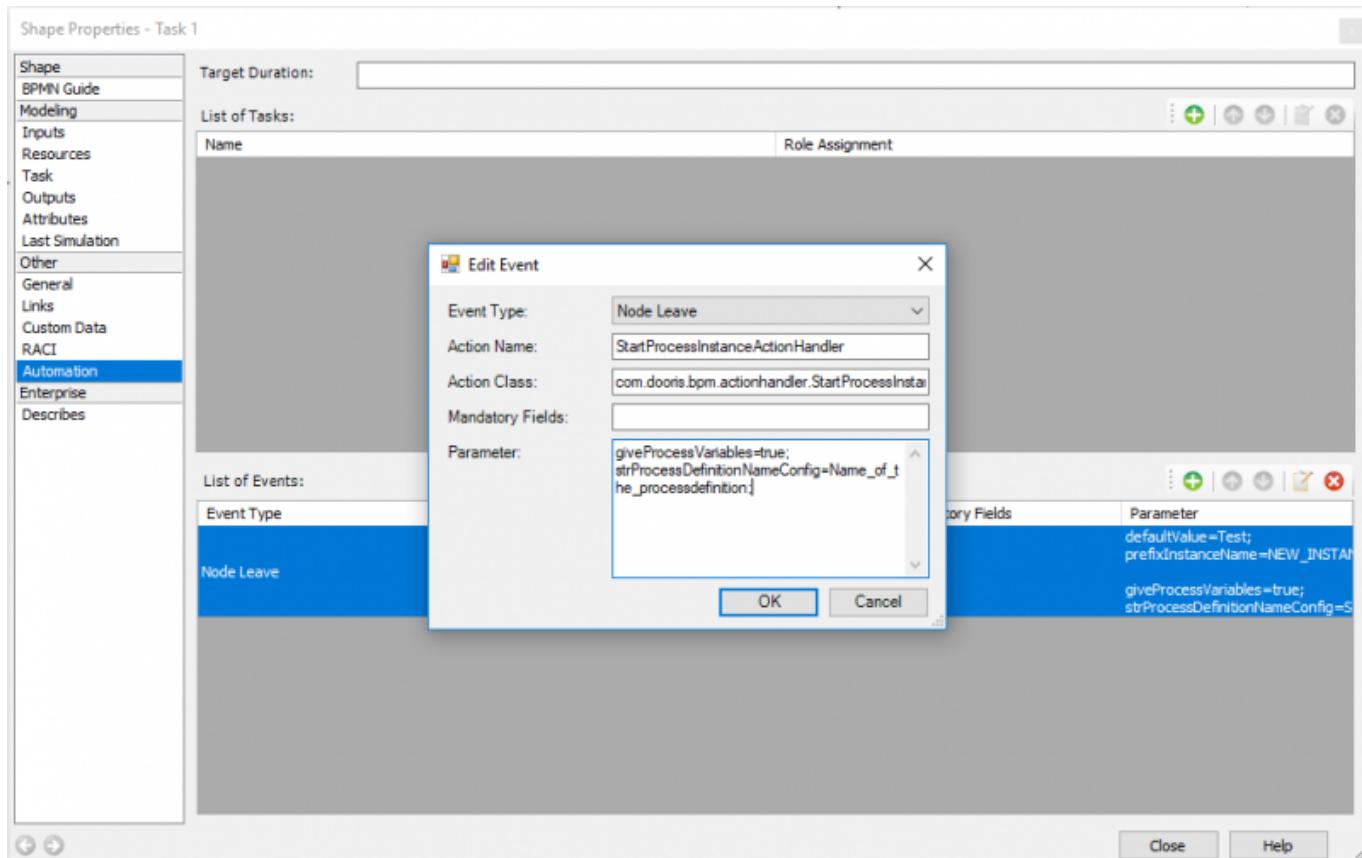

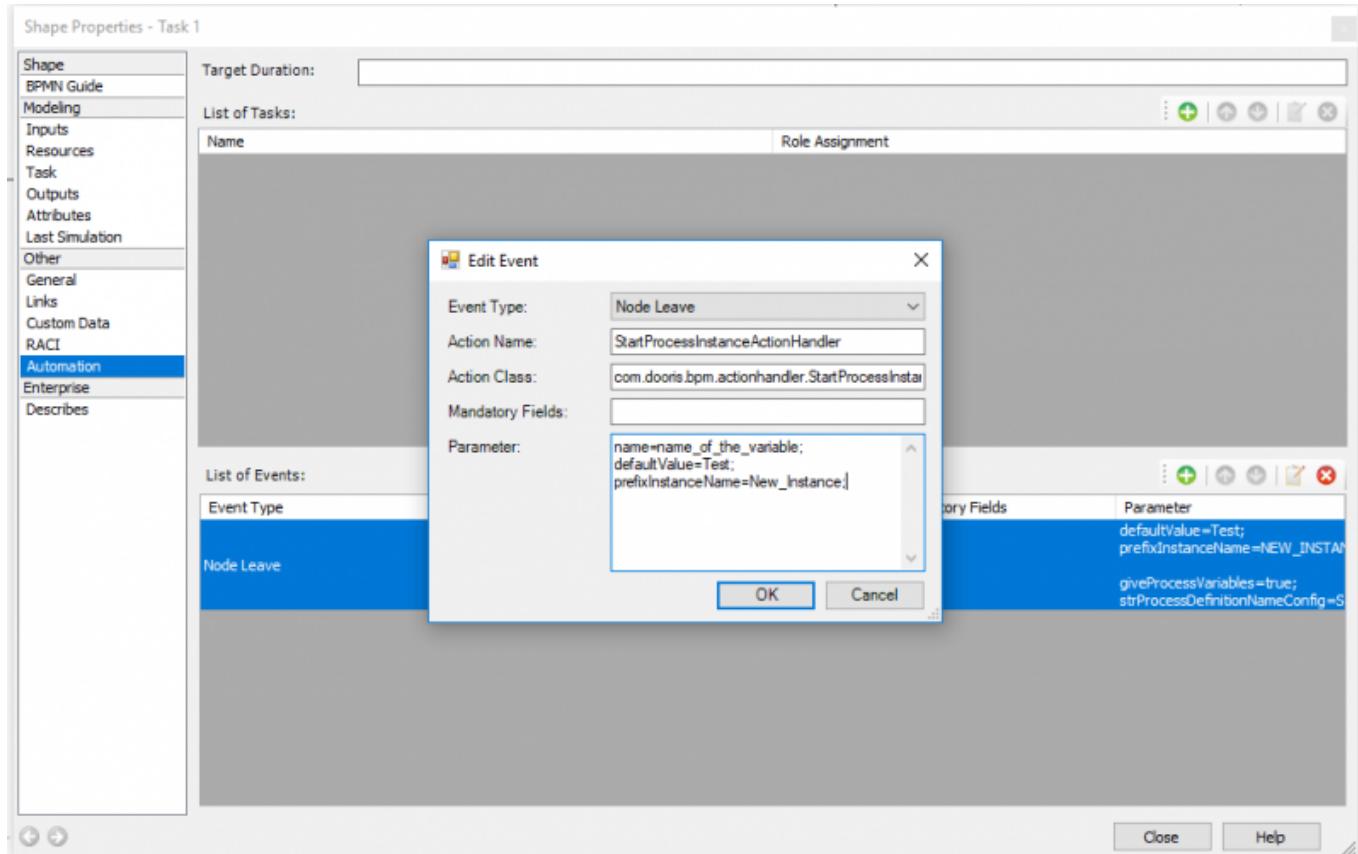

From:

<https://wiki.tim-solutions.de/> - TIM Wiki / [NEW TIM 6 Documentation](#)

Permanent link:

<https://wiki.tim-solutions.de/doku.php?id=en:software:tim:actionhandler:startprocessinstanceactionhandler>

Last update: 2021/07/01 09:52

