

 **This page is not fully translated, yet. Please help completing the translation.**
(remove this paragraph once the translation is finished)

VariableArchivationHandler

Description

This action handler searches for process variables that match a given pattern and then archives them. New variables are formed according to the following scheme:
altervariablenname_ARCHIVIERUNGSCOUNTNAME[COUNT]. The variables are then filled with the current values.
After this, the original variables are emptied.

Action Class

```
com.dooris.bpm.actionhandler.VariableArchivationHandler
```

Event Type

any

Action Name

any

Mandatory Fields

none

Parameter

variablePattern

Gives the pattern for the search.
i.e.: "%archive" In this case, all variables that look like the following would be found:

variable1_archive

archivationCount

Denotes the name of the variable in which a counter runs of how often archiving has taken place. Also, archived variables are renamed according to these parameters.


i.e.:

archivationCount = countName;

Before: variable1_archive

NacherAfter: variable1_archive_countName[0];

Example

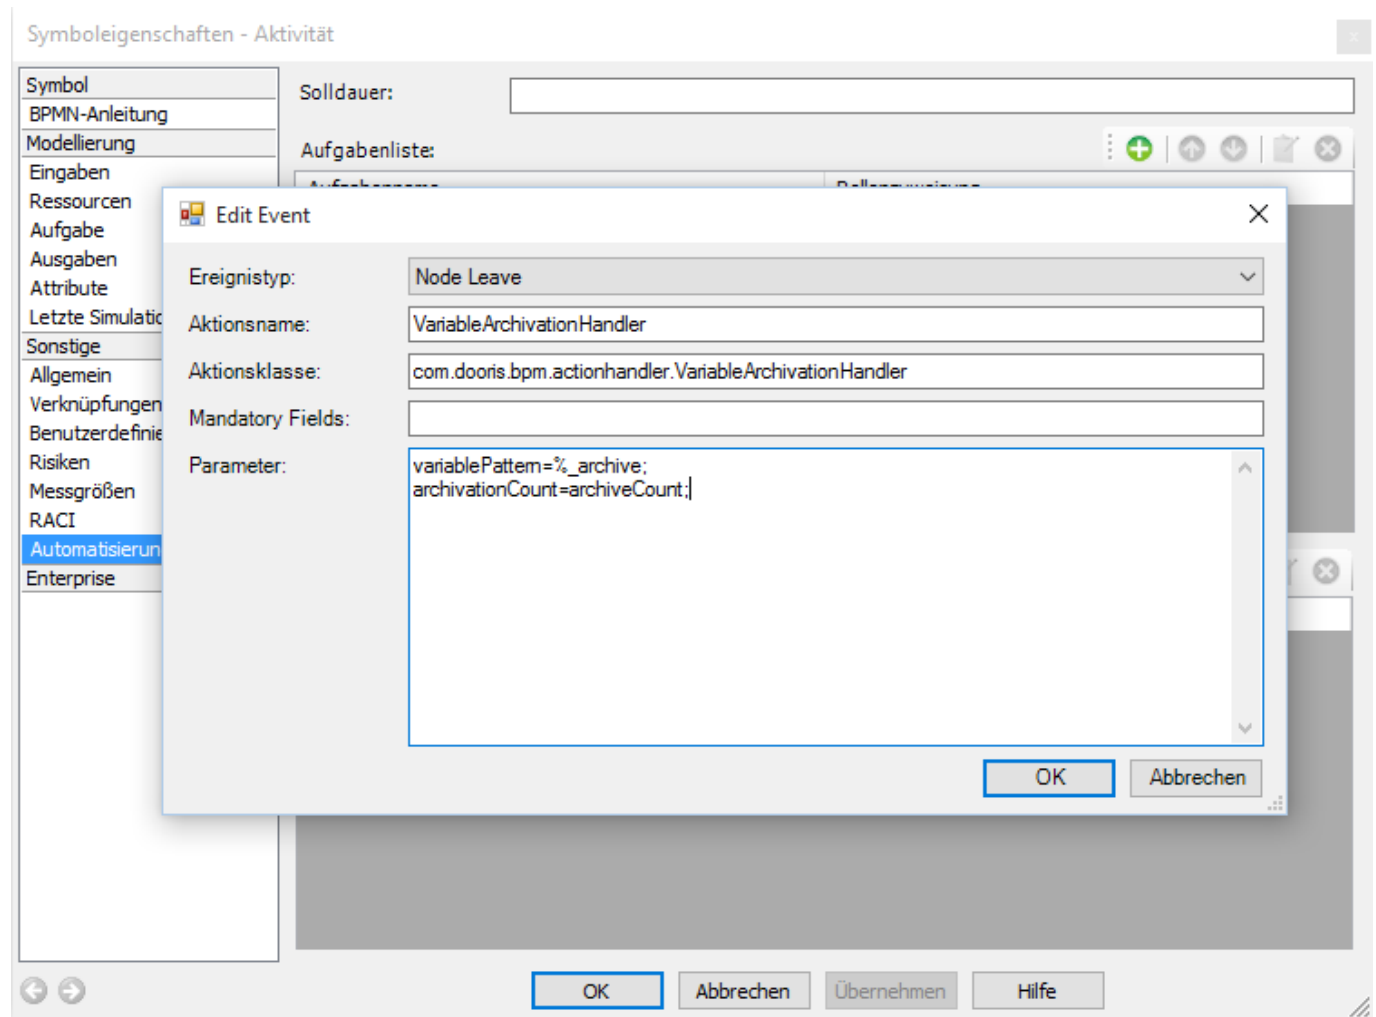

From:
<https://wiki.tim-solutions.de/> - **TIM Wiki** / [NEW TIM 6 Documentation](#)

Permanent link:
<https://wiki.tim-solutions.de/doku.php?id=en:software:tim:actionhandler:variablearchivationhandler&rev=1492075590>

Last update: **2021/07/01 09:54**

