

WordTemplateHandler

This [handler](#) describe a Word document with variables taken from smartform variables.

The parameter "overwriteExisting" tells if an existing template can be overwritten (true) or a new template should be created.

In order for the handler to be able to create PDFs, the [Open Office Converters](#) must be installed. From [Tim Version 3.7](#) on, the variables from the [VariablesHelper](#) may be used.

The images attached to the instance may be placed into the Word document. For this, special variables must be present in the template.

Individual images may be entered: `$img{Image.jpg}` ← Exact name of the entered imaged

Alternatively, all of the images attached to the instance may be entered: `$img{addAllImages}`

The WordTemplateHandler may also be built into the [Smartform](#) as a button, on order to generate a Template if needed. More on this subject is found [here](#)

Action Class

```
com.dooris.bpm.actionhandler.WordTemplateHandler
```

Event Type

any

Action Name

any

Mandatory Fields

-

Parameter

template

The path to the template is entered here. It may be entered as an absolute or relative to the `Externalfilepath` in the `loom.properties`.

In order to rename the generated PDF, the name of the template itself may contain process variables. (see [Example](#))

Special case: Resolving process variables in the document name

Given the template parameter has the following value:

template=\${SYS.PROCESSINSTANCE_NAME}_report.docx. In the target folder the file will be searched accordingly.

1. The `wordTemplateHandler` literally looks for the template **\${SYS.PROCESSINSTANCE_NAME}_report.docx**.
2. If it is unable to find the respective document, the process variables in the document name will be resolved.
3. Only now the `wordTemplateHandler` is looking for the template **8D-ProblemSolving_report.docx** (8D-ProblemSolving is the resolved value of `SYS.PROCESSINSTANCE_NAME`).

This procedure strongly increases the performance of the `wordTemplateHandler`

overwriteExisting (optional)

This may be either **true** or **false**. If the name is set to **true**, TIM overwrites the existing PDFs if the process runs again through a loop. If the PDF is still needed, the value must be set to **false**.

This value is set to **false** by default

documentPrefix

The **documentPrefix** can be used to attach the entered value to the template name of of the PDF as a prefix.

pdf (optional)

This value must first be set to **true** in order to TIM to generate a PDF. If the value is set to **false** or nothing is entered, TIM replaces the variables in the template and generates a Word file, which is then attached to the process.

interpretNumbersAsBoolean

If this value is not set by the user, the default is **false**. If the value is set to true, process variables (with names beginning with "bool") are transformed as follows:

Variable name	Value	Result in PDF
baa1	true	true
boolbaa1	true	ja
boolbaa1	1	ja
boolbbb1	false	nein
bobbb1	0	0
boolbbb1	0	nein

interpretBooleanAsHuman

This is set to **false** by default. If this value is set to true, the values of all of the variables marked as **true** or **false** are replaced with the values **yes** or **no**, respectively.

Available from Version 3.5 on!

target

With the **target** parameter the document name can be determined that is attached to the process instance in TIM. The document name can contain process variables.


Important: no file extension is needed within the target parameter

The document belonging to the instance of the 8D Problem Solving process is e.g. saved as **1467_8D-ProblemSolving_report.docx**.

```
target=${processInstanceId}_${processInstanceName}_report
```

Process instance		
Properties	Documents	Note
<div style="display: flex; justify-content: space-between;"> Swimlanes Model Gantt Smartform Efforts Activities CPM-Info Process Control </div>		
Name	Comment	Creation Time
1467_8D-ProblemSolving_report.docx	-	05/25/2016, 10:14 AM

Example

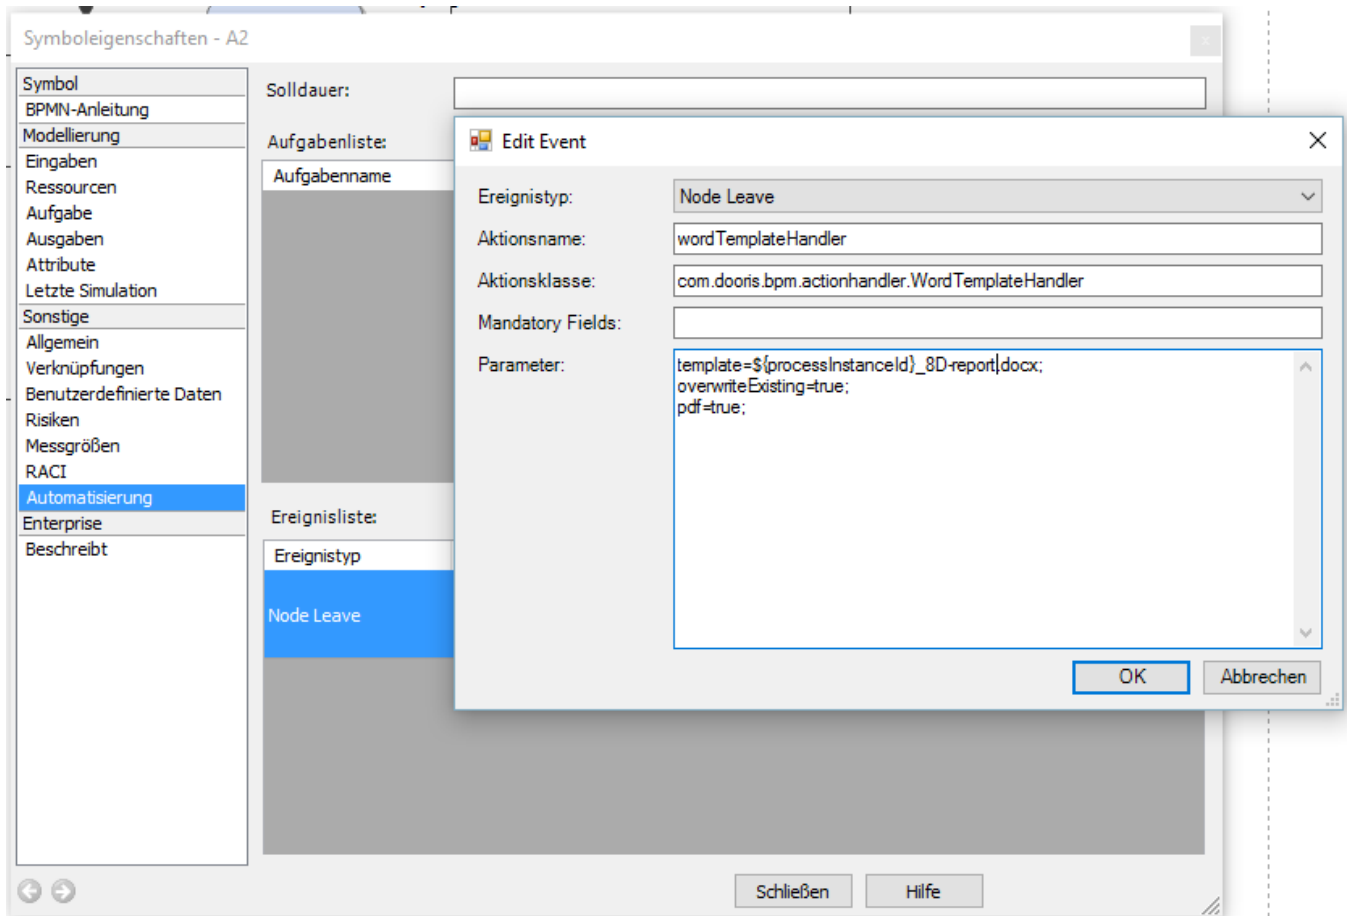

In this example, a PDF is attached after the activation of the wordTemplateHandler. It is composed as follows:

```
Änderungsabwicklung_E1_tim_123_test_1.pdf
```

Integrating the Wordtemplatehandler into the Smartform

The Wordtemplatehandler can be integrated into the smartform as a link, a button, or an image so that participants can create a template at any time. For this, the following code must be integrated into the smartform:

```
<button type="button"
onbuttonclick="generateFileFromTemplate([ {handler: 'WordTemplateHandler', template: 'pfad/zumTemplate.docx', pdf: false, attach: false, open: true, documentPrefix: 'Prefix' } ])">
```

Further information can be found on [this page](#).

Potential problems

Typical Errors

From:
<https://wiki.tim-solutions.de/> - **TIM Wiki** / [NEW TIM 6 Documentation](#)

Permanent link:
<https://wiki.tim-solutions.de/doku.php?id=en:software:tim:actionhandler:wordtemplatehandler&rev=1464164580>

Last update: **2021/07/01 09:54**

