


 **This page is not fully translated, yet. Please help completing the translation.**
(remove this paragraph once the translation is finished)

Adapt context roles

Via the administration client, context roles can be added and adapted. Context roles fulfill the task of allotting a separate **role** to a certain user within a process.

If a context role is adapted, the following window opens:

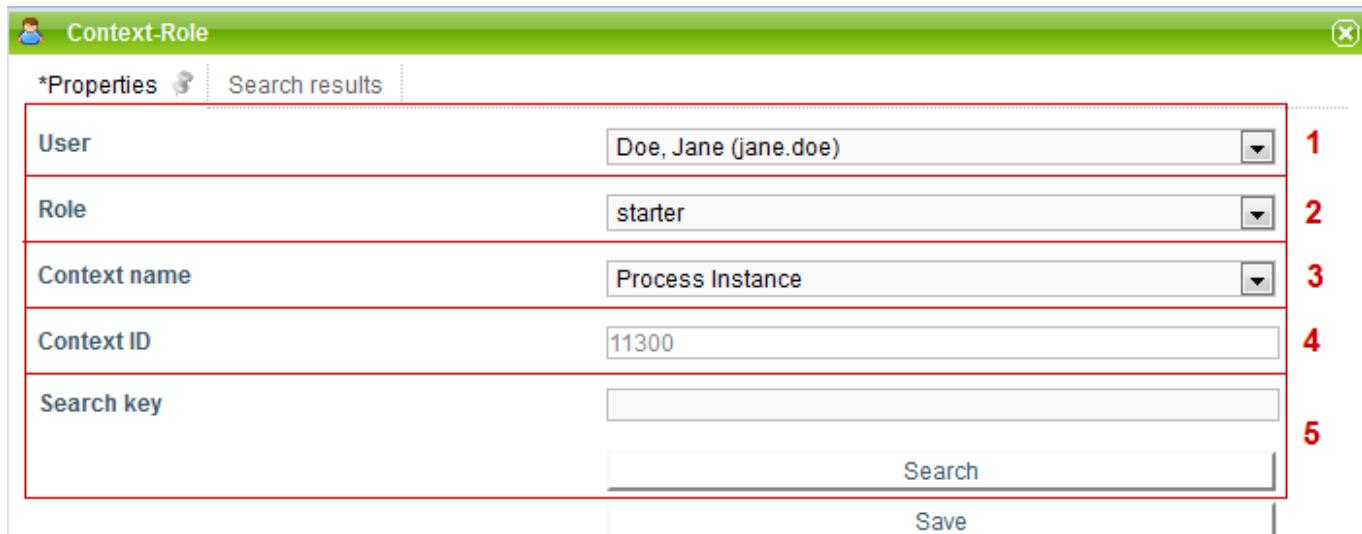

Element	Description
1	Here, the user for which the role is created, is picked. A click on the dropdown will open it and all users arranged will be displayed. The one required can now be chosen.
2	This dropdown serves for the selection of which of the above mentioned roles the user should play.
3	Here, the context name is chosen, that is in which frame the context role is located.
4	Here, the context-ID, which specifically indicates which definition/instance is designated for this role, is displayed. This field can not be adapted directly but is filled via the search (Element 5). See search

Search

In order to allot a precise merit to a context role, the search has to be used. For this, something has to be entered into the search field.

If process definition is chosen in the context name, then the name of the wanted process definition has to be entered in the search field.

If process instance is chosen, the name of the process instance for which the role is to be valid has to be entered in the search field.

The same counts for process-definition templates.

It is also possible to start the search without making an entry. A list of all possible results will then be released.

After a successful search the tab "**Search result**" will open.

Context-Role	
*Properties	
Name	ID
Instance from Special request	11289
Instance from Special request	11291
Instance from Special request	11292
Instance from Special request	11293
Instance from TIM Wiki Prozess	11294
Instance from TIM Wiki Prozess	11295
Instance from TIM Wiki Prozess	11296
Instance from TIM Wiki Prozess	11297
Instance from TIM Wiki Prozess	11298
Instance from TIM Wiki Prozess	11299

< Page out of 5 >

In this list the different instances which correspond with the search will appear. A click on an element of the list will get you to the tab “**Properties**” and the ID of the corresponding selection is noted in the context-ID field (Element 4).

Follow context roles

Please register in [Admin Client](#) with your admin user.

The screenshot shows the TIM Task In Motion login interface. It features a green header bar with the word "Anmeldung". Below the header is the TIM logo. The main area contains three input fields: "Login" with the value "tim4you/admin", "Passwort" with a masked value, and "Client" with a dropdown menu set to "Administration - TIM". At the bottom is a "Login" button.

TIM - Task In Motion v4.0

Choose the point **User** in the tab **Administration** and to a right click on the regarding user. Choose the point **Add context role**.

The screenshot shows the TIM administration interface. The top navigation bar has tabs for Administration, Context-Roles, Scheduled Jobs, and Mail Queue. The Context-Roles tab is active. Below the navigation, there's a tree view of contexts. One context, 'tim4you', is expanded, showing its sub-components: CalendarProfil tim4you, Groups, and Users. Under 'Users', several users are listed: Alf's, Martin (Alfs), Doe, Jane (jane.doe), Doe, John (john), Manager, Prozes, Mustermann, Ma, admin (admin), and guest (guest). A context menu is open for 'Doe, Jane (jane.doe)'. The menu items are: Userprofile, Remove User, Add Context-Role (which is highlighted with a green background), and Context-Roles.

In the popup **Context role** you choose a role (preferably starter).

The screenshot shows the 'Context-Role' configuration dialog. It has a header 'Context-Role' and tabs for 'Properties' and 'Search results'. The 'Properties' tab is active. It contains fields for 'User' (set to 'Doe, Jane (jane.doe)'), 'Role' (set to 'starter'), 'Context name' (set to 'Process definition'), 'Context ID' (empty), and 'Search key' (empty). At the bottom are 'Search' and 'Save' buttons.

For the context name you choose process definition.

In the field search term you type the beginning of the corresponding process definition and click on the button search.

In the following popup the columns can be newly arranged via a click on ID. The top entry matches the latest process definition.

The screenshot shows a search results table titled 'Context-Role'. The table has two columns: 'Name' and 'ID'. The rows list various process definitions, each with a small icon. The last row, 'TILM Wiki Prozess', has the highest ID, which is 8981. The table includes a page navigation at the bottom with '< Page 8 out of 9 >'.

Name	ID
TILM Wiki Prozess	8972
Special request	8973
Special request	8974
Special request	8975
Special request	8976
Special request	8977
TILM Wiki Prozess	8978
TILM Wiki Prozess	8979
TILM Wiki Prozess	8980
TILM Wiki Prozess	8981

Choose the row with the highest ID of your definition via a click.

Last update: 2021/07/01 en:software:tim:edit_context_role https://wiki.tim-solutions.de/doku.php?id=en:software:tim:edit_context_role&rev=1418743919 09:55

Context Role

*Properties Search results

User	Doe, Jane (jane.doe)
Role	starter
Context name	Process definition
Context ID	8973
Search key	
Search	
Save	

Via a final click on the button save you have updated the corresponding context role.

From:
<https://wiki.tim-solutions.de/> - TIM Wiki / [NEW TIM 6 Documentation](#)



Permanent link:
https://wiki.tim-solutions.de/doku.php?id=en:software:tim:edit_context_role&rev=1418743919

Last update: **2021/07/01 09:55**