

## Jboss encryption module and web frontend for TIM

TIM encoder uses a Jboss module for encryption and to validate keys. The encryption is used e.g. for database connections and third-party applications within the configuration files in order to hide sensitive information like usernames and passwords from plain sight.

To use this module the following steps need to be done:

1. Add the encoder.war of the TIM Encryption Webarchive
2. Modify the standalone-tim.xml
3. Generating a java key with web-interface or console

### Add the encoder.war of the TIM Encryption Webarchive

To enable TIM to encrypt usernames and passwords and to use those encrypted values insert the encoder.war to the standalone\deployments folder in your %JBoss\_HOME% e.g. C:\tim\jboss-eap-7.1\standalone\deployments. Upon JBoss startup it will deploy automatically.

### Modify the standalone-tim.xml

```
<subsystem xmlns="urn:jboss:domain:datasources:1.2">
  <datasources>
    <datasource jta="true" jndi-name="java:/doorisPortalDB" pool-name="doorisPortalDB" enabled="true" use-java-context="true" use-cm="true">
      <connection-url>jdbc:sqlserver://localhost:1433:databaseName=test:</connection-url>
      <driver>sqlserver</driver>
      <pool>
        <min-pool-size>20</min-pool-size>
        <max-pool-size>150</max-pool-size>
      </pool>
      <!--security-->
      <user-name>test</user-name>
      <password>test</password>
      </security-->
      <security>
        <security-domain>secDomDS</security-domain>
      </security>
      <validation>
        <check-valid-connection-sql>SELECT 1</check-valid-connection-sql>
        <validate-on-match>true</validate-on-match>
        <background-validation>false</background-validation>
        <use-fast-fail>false</use-fast-fail>
      </validation>
    </datasource>
  </datasources>
</subsystem>
```

e

standalone.xml are made accordingly. In your *subsystem datasource* below your database implemet:

```
<security>
  <security-domain>secDomDS</security-domain>
</security>
```

as can be seen in the first screenshot.

In the *subsystem security* add:

```
<security-domain name="secDomDS" cache-type="default">
  <authentication>
    <login-module
code="org.picketbox.datasource.security.TimSecureIdentityLoginModule"
flag="required">
      <module-option name="username" value="$enc$c5507593f47122e"/>
      <module-option name="password"
value="$enc$-3c3702fd5f714bd0045dcdcd12584c8"/>
    </login-module>
  </authentication>
</security-domain>
```

as can be seen in the screenshot below.



```
<subsystem xmlns="urn:jboss:domain:security:1.2">
  <security-domains>
    <security-domain name="other" cache-type="default">
      <authentication>
        <login-module code="Remoting" flag="optional">
          <module-option name="password-stacking" value="useFirstPass"/>
        </login-module>
        <login-module code="RealmDirect" flag="required">
          <module-option name="password-stacking" value="useFirstPass"/>
        </login-module>
      </authentication>
    </security-domain>
    <security-domain name="jboss-web-policy" cache-type="default">
      <authorization>
        <policy-module code="Delegating" flag="required"/>
      </authorization>
    </security-domain>
    <security-domain name="jboss-ejb-policy" cache-type="default">
      <authorization>
        <policy-module code="Delegating" flag="required"/>
      </authorization>
    </security-domain>
    <security-domain name="loom" cache-type="default">
      <authentication>
        <login-module code="com.dooris.security.LoomLoginModule" flag="required"/>
      </authentication>
    </security-domain>
    <security-domain name="secDomDS" cache-type="default">
      <authentication>
        <login-module code="org.picketbox.datasource.security.TimSecureIdentityLoginModule" flag="required">
          <module-option name="username" value="$enc$3b7965db3d853e17"/>
          <module-option name="password" value="$enc$-44f6b421a454e75a"/>
        </login-module>
      </authentication>
    </security-domain>
  </security-domains>
</subsystem>
```

## Generating a java key with web-interface or console

---

There are two ways to encrypt your credentials. Either with the web-interface or with via the console.

The module can be called via the web-interface e.g. [http://your\\_tim\\_url:port/encoder/](http://your_tim_url:port/encoder/) . In order to encrypt a secret insert use the text field and hit the *encrypt secret* button. To validate a encrypted secret past the secret in the correct text field and hit the *validate encrypted secret* button. This

method can as well be used to encrypt any secret in e.g tim.properties or dashboard.properties.

To encode your credentials via console use the following commands:

to generate a key:

```
java -cp modules/system/layers/base/org/picketbox/main/tim-encoder-
module.jar:modules/system/layers/base/org/picketbox/main/picketbox-4.1.1.Fin
al-redhat-1.jar
org.picketbox.datasource.security.TimSecureIdentityLoginModule '123'
```

to validate password-key combination:

```
java -cp modules/system/layers/base/org/picketbox/main/tim-encoder-
module.jar:modules/system/layers/base/org/picketbox/main/picketbox-4.1.1.Fin
al-redhat-1.jar
org.picketbox.datasource.security.TimSecureIdentityLoginModule '123'
'$enc$b530c41fe274111'
```

to validate the key:

```
java -cp modules/system/layers/base/org/picketbox/main/tim-encoder-
module.jar:modules/system/layers/base/org/picketbox/main/picketbox-4.1.1.Fin
al-redhat-1.jar
org.picketbox.datasource.security.TimSecureIdentityLoginModule ''
'$enc$b530c41fe274111'
```

## TIM Properties

---

In tim.properties credentials can be encrypted with the encoder or the console and replace plain text usernames and passwords. As an example the image shows setting and editing the superuser and client-administrator passwords:


```
#Default init password
initpass-super-admin=$enc$7875f8726e1ed2c7
initpass-super-sys.support=$enc$-66c2ca6af02ba4c5
initpass-x-admin=$enc$66cb4a689ca87a97
initpass-x-sys.support=$enc$-37fa8d4f2b81e0c9
initpass-x-others=$enc$6ec2f555069f3ca1
```

## E-Mail Configuration

---

In the properties of the client under the category mail server are the parameters SmtUser and SmtPassword.

These credentials can be encrypted accordingly to the methods above and as shown in the example.

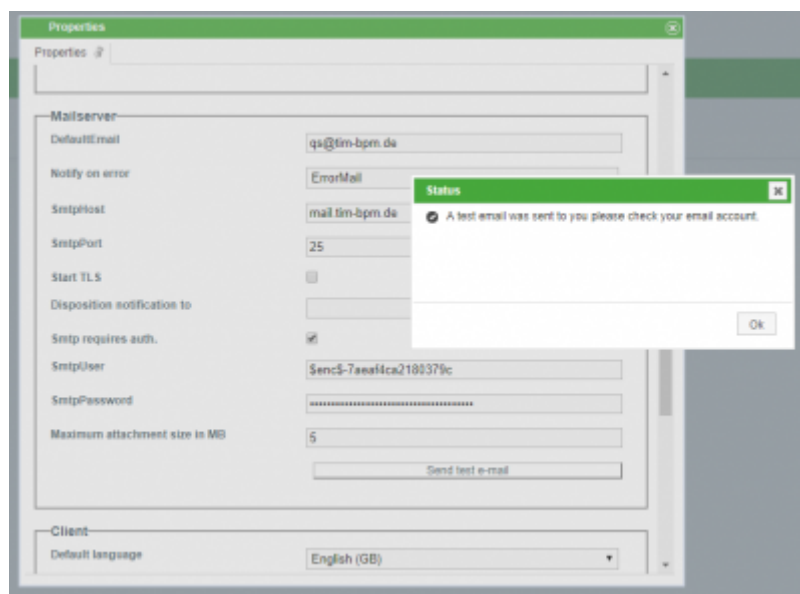

## Actionhandler

---

Actionhandler like HTTPRequestHandler or RunSqlScriptHandler use credentials that can be encrypted by said methods. The example shows the RunSqlScriptHandler where \${user} and \${pass} are

Name

dbCall

Event Type

Node Leave

Event Class

com.dooris.bpm.actionhandler.RunSqlScriptHandl...

Mandatory Fields

Parameter

Add Parameter

|                 |                  |      |
|-----------------|------------------|------|
| databaseEngi... | \${databaseEn... | Edit |
| connectionSt... | \${connection... | Edit |
| host            | \${(host);       | Edit |
| port            | \${(port);       | Edit |

```
graph LR; Start([Start]) --> CallREST[Call REST]; CallREST --> Dec1{REST call successful?}; Dec1 -- Yes --> CallDB[Call DB]; Dec1 -- No --> LogError[Log Error]; CallDB --> Dec2{DB call successful?}; Dec2 -- Yes --> End([End]); Dec2 -- No --> LogError;
```

RunSqlScriptHandler

databaseEngine

connectionString

host

port

database

User

pass

query

msg

jdbc:sqlserver://localhost:1433;databaseName=tim\_594

localhost

1433

tim\_594

8enc33b7965db3d853e17

8enc3-42792bce12a8cd95

SELECT \* FROM Mitarbeiter WHERE Gehalt>50000;

passed on encrypted

## Timer

From:  
<https://wiki.tim-solutions.de/> - **TIM Wiki** / [NEW TIM 6 Documentation](#)

Permanent link:  
[https://wiki.tim-solutions.de/doku.php?id=en:software:tim:encryption\\_tim&rev=1529934246](https://wiki.tim-solutions.de/doku.php?id=en:software:tim:encryption_tim&rev=1529934246)

Last update: **2021/07/01 09:54**

TIM Wiki / [NEW TIM 6 Documentation](https://wiki.tim-solutions.de/) - https://wiki.tim-solutions.de/