

Description

This timer selects a file from a specific folder. After this, it renames the process instance(s) that have been started. Additionally, the file is attached to the instance. The file may also be saved in a given folder.

Timer Name

Any name i.e.

```
CreateProcessInstanceFromInputFolder
```

Webservice Name

```
ProcessInstanceManager
```

Webservice Method

```
createProcessInstancesByHandler
```

Parameter

```
com.dooris.bpm.actionhandler.CreateProcessInstanceFromInputFolder,ERSETZE_MICH1;C:\Dokumente\input;C:\Dokumente\backup;
```

Parameter1

com.dooris.bpm.actionhandler.CreateProcessInstanceFromInputFolder → Actionhandlerklasse

Parameter2

ERSETZE_MICH1 → Process definition

Parameter3

Path of the document

Parameter4

The path along which the file is to be moved after it has been attached to the process instance.


Caution! Please do not forget to put a “,” (comma) between the first parameter (action handler class) and the second parameter (process definition) to separate them! A “;” (semicolon) is used as a separator in the parameters coming thereafter!

Additional Mandatory Fields

- Executing user
- Time until start
- Time interval
- Max. number of runs

Note: if a “starting time” is given, the “time until start” field does not need to be filled out.

Example

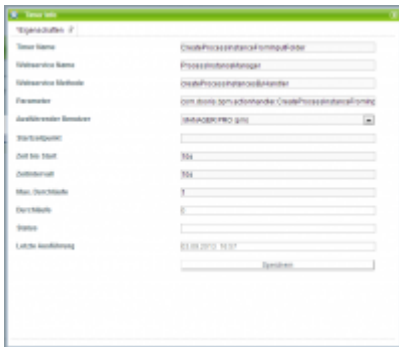

From: <https://wiki.tim-solutions.de/> - **TIM Wiki** / [NEW TIM 6 Documentation](#)

Permanent link: <https://wiki.tim-solutions.de/doku.php?id=en:software:tim:timer:createprocessinstancefrominputfolder>

Last update: **2021/07/01 09:52**

