

RenameInstanceHandler

Description

This [handler](#) renames the current instance by any text that can include variables.

Action Class

```
com.dooris.bpm.actionhandler.RenameInstanceHandler
```

Event Type

any type

Action Name

any name

Mandatory Fields

-

Parameter

instanceName = desired_name_\${variable}

Variables are specified as \${variablename} (see [Example](#))

A continuous ID for process instances

The [system variable](#) `${SYS.BUSINESS_ID}` generates a unique, continuous ID for every created process instance. The system variable can be used in the `renameInstanceHandler`. Thus, every created process instance is given a unique, continuous ID.

Automation Properties

[← Back to Automation](#)

Name

Rename Instance

Event Type

Node Enter ▼

Event Class

com.dooris.bpm.actionhandler.RenameInstanceHa

Mandatory Fields

Add new parameter

Name

instanceName


Value

\${SYS.BUSINESS_ID}

SAVE PARAMETER

Cancel

Example

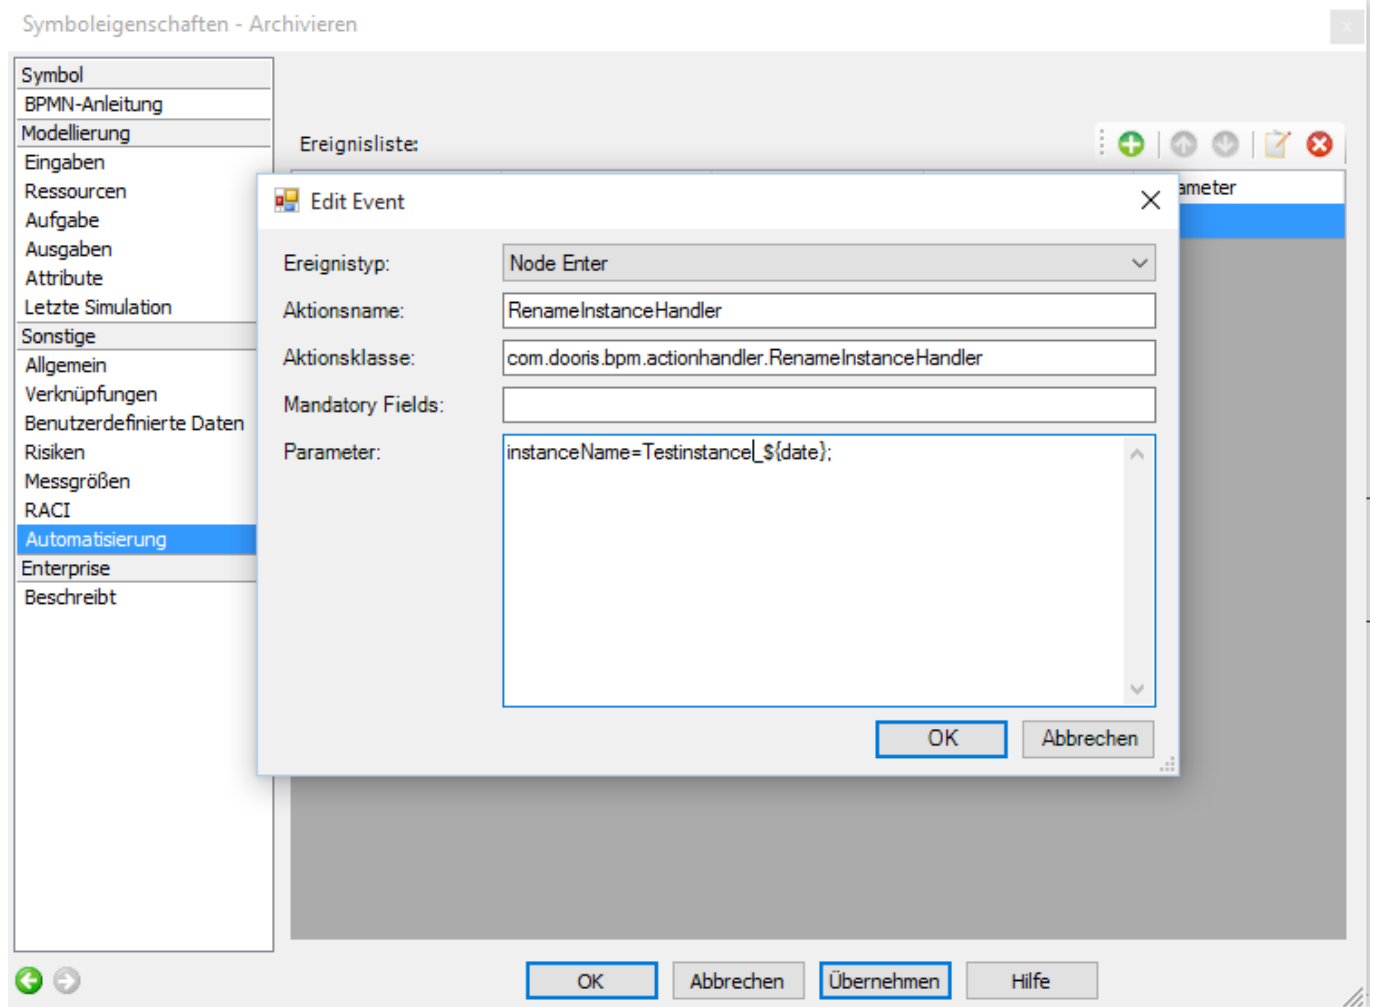

From:
<https://wiki.tim-solutions.de/> - **TIM Wiki** / **NEW TIM 6 Documentation**

Permanent link:
<https://wiki.tim-solutions.de/doku.php?id=en:software:tim:actionhandler:renameinstancehandler&rev=1492073489>

Last update: **2021/07/01 09:54**

